

The WOODWAY Blade is a training tool designed for use with ordinary hockey skates

Revolutionary Training Concept

- Ability to skate continuously for time or distance
- Use positive and negative elevation to develop speed and power
- Convenient and accurate measurement of speed, distance and time
- Large enough surface area to practice crossovers, simulate skating into a corner and skate/turn backwards.

Continuous Belt Style Skating System

- Individual slats with polyethylene surface
- Zero stretch and Zero slip toothed, wire-reinforced lateral belts
- Near frictionless precision ball bearing rail guide

Safety and Reliability

- Emergency stop button
- 4 fully adjustable harnesses
- Based on proven WOODWAY slat and ball bearing design

Standard Blade Skatemill Equipment

- Off-mount color LCD touch panel display and controls
- Off-mount emergency push button stop switch
- Plastic "practice ice" side cover protectors
- 4 fully adjustable safety harnesses
- Blade mounted handrail
- Remote Pendant control of speed, elevation and stop




*above shown with optional equipment: Safety Gantry, Puck Plate and Blade mounted handrail

Additional Options:

- WOODWAY Gantry System
 - 4 post freestanding with
 - overhead continuous oval track system
 - 4 free rolling trolley safety harness mounting systems
- WOODWAY overhead continuous oval track gantry system
 - Must be secured into facility ceiling
 - Installed by facility/blade owners
 - 4 free rolling trolley safety harness mounting systems
- Blade mounted puck plate
- "Practice Ice" 122 x 244 cm sheet
- Remote pendant speed, elevation and stop control
- RS-232 serial port interface (includes MedPro software)
- White skating surface
- Additional safety harnesses
- Additional free rolling trolley safety harness mounting systems

Dimensions

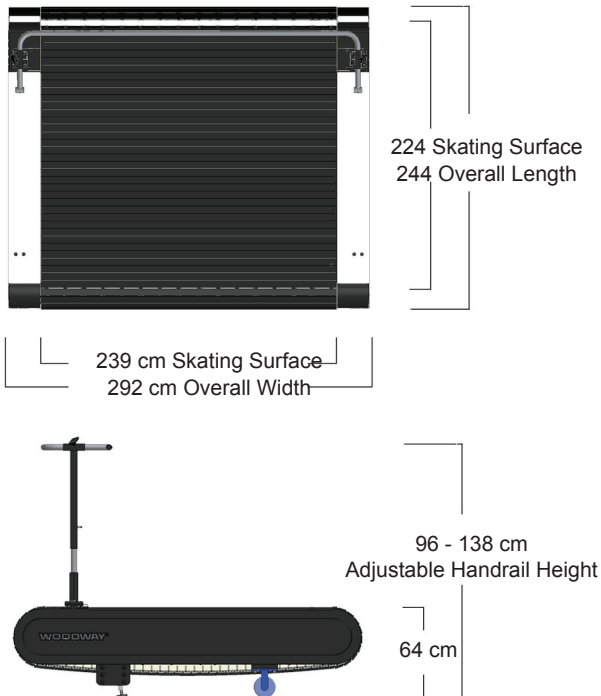

Physical Specifications

Belt Type	87 individual slats
Drive System	316 ABEC 1 rated ball bearings with 32 guide rollers (4 mm lateral tolerance)
Skating Surface	Polyethylene
Drive Motor	5 hp continuous (15 hp peak) brushless servo
Unit Weight	1,361 kg
Power Supply	220 V AC single Phase with L6-30 NEMA Plug, requires dedicated 30 A circuit (6kVA input)

Performance Specifications

Skating Surface Area	224 L X 239 cm
Speed Range	0 - 32 mk/h, zero start 0-8 km/h reverse, zero start 0.1 km/h increments
Elevation Range	(-5%) - (+35%)
Warranty	3 year motor 3 year parts (excluding skating surface) 1 year labor